

SWSL2023RT

Scissors Aerial Work Platform

SUNWARD



Dual extension decks



Auto-leveling outriggers



Maintenance lock



Drawer type Engine bracket

FEATURES




| | | | | |
|------------------|-----------------------------|-------------------------------------|-------------------------|-----------------------------|
| ◆Alarm | ◆Drawer type Engine bracket | ◆Proportional control | ◆Fault diagnosis system | ◆Platform interlock door |
| ◆Motion alarm | ◆Maintenance lock | ◆Dual extension decks | ◆Tilt protection system | ◆Overload protection system |
| ◆Flashing beacon | ◆Quad-Trax 4WD | ◆Fold-down guardrails | ◆Emergency stop system | ◆Auto-leveling outriggers |
| ◆Hour meter | ◆Automatic braking system | ◆Tubing explosion protection system | ◆Emergency down system | ◆Solid tires |

OPTIONS

| | | | | |
|-----------------------|----------------------|------------------------|-----------------|-----------------------|
| ◆Hydraulic alternator | ◆Extra toolbox | ◆Platform folding seat | ◆Non-mark tires | ◆Hydraulic oil cooler |
| ◆Fire extinguisher | ◆Platform work light | ◆AC power to platform | | |

SWSL2023RT

Scissors Aerial Work Platform

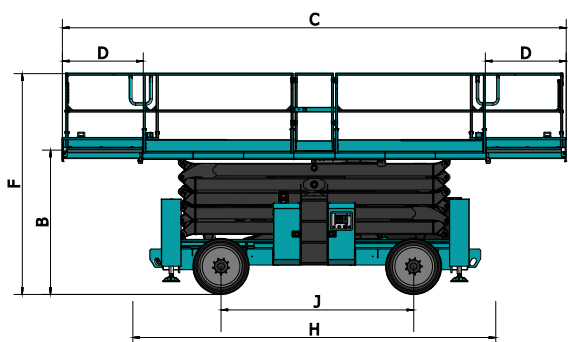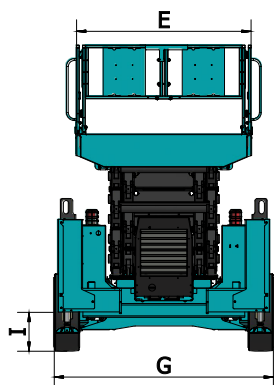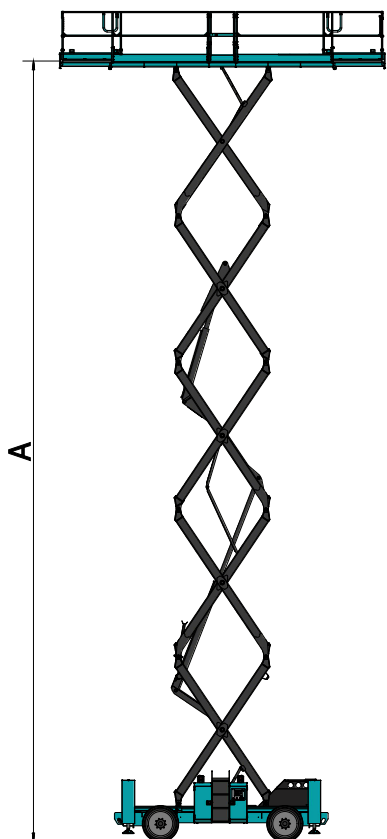

DIMENSION

| | | |
|----------------------------|----------------------|---------------|
| Working height | 66'7"(20m) | |
| A Platform height | 60'0"(18m) | |
| B Platform height (stowed) | 7'0"(2.14m) | |
| C | Platform length | 17'6"(5.33m) |
| | Roll-out deck | 24'8"(7.53m) |
| D | Roll-out deck length | 3'11"(1.2m) |
| E | Platform width | 6'3"(1.9m) |
| F | Height(Fence raise) | 10'10"(3.31m) |
| | Height(Fence folded) | 8'2"(2.48m) |
| G | Width | 7'10"(2.39m) |
| H | Length | 17'5"(5.33m) |
| I | Ground Clearance | 11"(0.27m) |
| J | Wheelbase | 9'5"(2.88m) |

PERFORMANCE

| | |
|---------------------------------|-------------------------|
| Capacity | 1200lbs(545kg) |
| Roll-out deck capacity | 500 lbs(227kg) |
| Max. occupants | 4 |
| Drive height | 33'0"(10m) |
| Travel speed (stowed) | 4.5mph(7.2km/h) |
| Travel speed (raised) | 0.4mph(0.6km/h) |
| Max. Allowable Working Angle | 2°/3° |
| Turning radius (inside/outside) | 6'10"/17'5"(2.08m/5.3m) |
| Raise/Lower Time | 65/59sec |
| Gradeability | 40% |
| Control system | Proportional |
| Drive system | 4X4 |
| Tires | 33X12-20 |
| Power source | Kubota V2403-M-DI |
| Horsepower | 49hp(36.5 kw)/2600rpm |
| Hydraulic Tank Capacity | 40gal(151L) |
| Fuel Tank Capacity | 25gal(95L) |
| Weight | 21800lbs(9900kg) |